


# S3PDB100N16


## Three Phase Rectifier Modules



Type	V <sub>RSM</sub> V	V <sub>RRM</sub> V
S3PDB100N08	900	800
S3PDB100N12	1300	1200
S3PDB100N14	1500	1400
S3PDB100N16	1700	1600
S3PDB100N18	1900	1800



Dimensions in mm (1mm=0.0394")

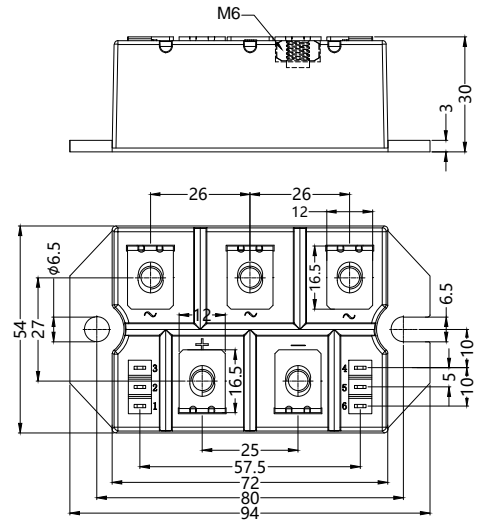

Symbol	Test Conditions	Maximum Ratings	Unit	
I <sub>dav</sub>	T <sub>C</sub> =100°C, module	100	A	
I <sub>dav</sub>	T <sub>A</sub> =35°C (R <sub>thCA</sub> =0.2K/W), module	91		
I <sub>FSM</sub>	T <sub>VJ</sub> =45°C V <sub>R</sub> =0	t=10ms (50Hz), sine t=8.3ms (60Hz), sine	920 1000	A
	T <sub>VJ</sub> =T <sub>VJM</sub> V <sub>R</sub> =0	t=10ms(50Hz), sine t=8.3ms(60Hz), sine	770 850	
I <sup>2</sup> t	T <sub>VJ</sub> =45°C V <sub>R</sub> =0	t=10ms (50Hz), sine t=8.3ms (60Hz), sine	5540 5540	A <sup>2</sup> s
	T <sub>VJ</sub> =T <sub>VJM</sub> V <sub>R</sub> =0	t=10ms(50Hz), sine t=8.3ms(60Hz), sine	3850 3850	
T <sub>VJ</sub>		-40...+150	°C	
T <sub>VJM</sub>		150		
T <sub>stg</sub>		-40...+125		
V <sub>ISOL</sub>	50/60Hz, RMS I <sub>ISOL</sub> ≤1mA	t=1min t=1s	2500 3000	V~
	M <sub>d</sub>	Mounting torque (M6) Terminal connection torque (M6)	5 ± 15% 5 ± 15%	
Weight	typical	262	g	

**Sirectifier®**

# S3PDB100N16

## Three Phase Rectifier Modules

Symbol	Test Conditions	Characteristic Values	Unit
$I_R$	$V_R=V_{RRM}; T_{VJ}=25^{\circ}\text{C}$ $V_R=V_{RRM}; T_{VJ}=T_{VJM}$	$\leq 0.3$ $\leq 5$	mA
$V_F$	$I_F=100\text{A}; T_{VJ}=25^{\circ}\text{C}$	$\leq 1.25$	V
$V_{FO}$	For power-loss calculations only	0.8	V
$r_F$	$T_{VJ}=T_{VJM}$	4	m $\Omega$
$R_{thJC}$	per diode per module	0.9 0.15	K/W
$R_{thJK}$	per diode per module	1.08 0.18	K/W
$d_s$	Creeping distance on surface	10	mm
$d_A$	Creepage distance in air	9.4	mm
$a$	Max. allowable acceleration	50	m/s <sup>2</sup>

### FEATURES

- \* Package with screw terminals
- \* Isolation voltage 3000 V~
- \* Glass passivated chips
- \* Blocking voltage up to 1800 V
- \* Low forward voltage drop
- \* UL File NO.E310749
- \* RoHS compliant

### APPLICATIONS

- \* Supplies for DC power equipment
- \* Input rectifiers for PWM inverter
- \* Battery DC power supplies
- \* Field supply for DC motors

### ADVANTAGES

- \* Easy to mount with two screws
- \* Space and weight savings
- \* Improved temperature and power cycling

# S3PDB100N16

## Three Phase Rectifier Modules





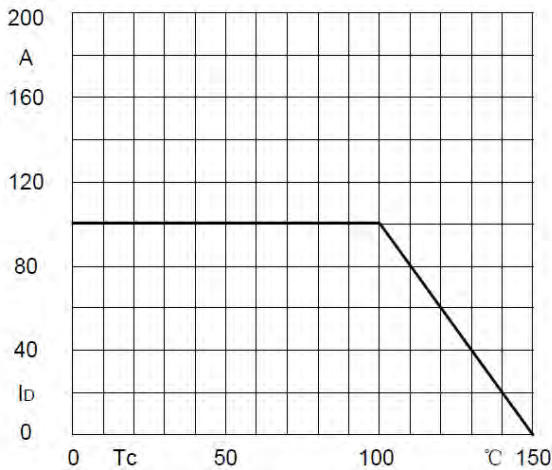


Fig5. Forward Current Derating Curve

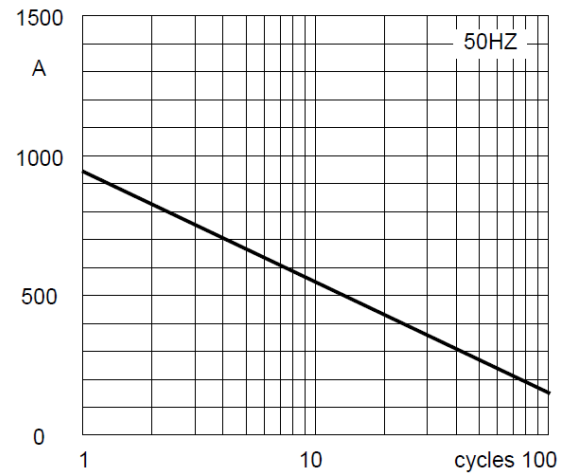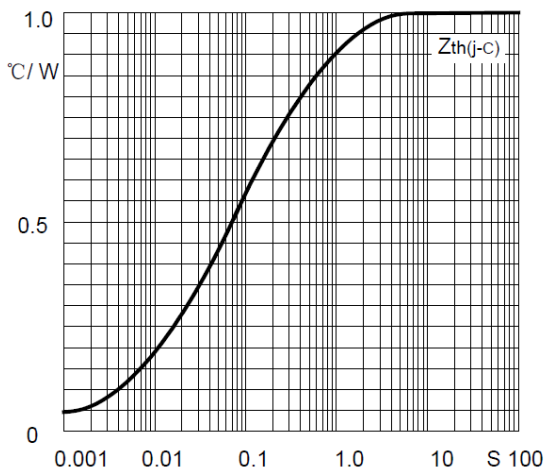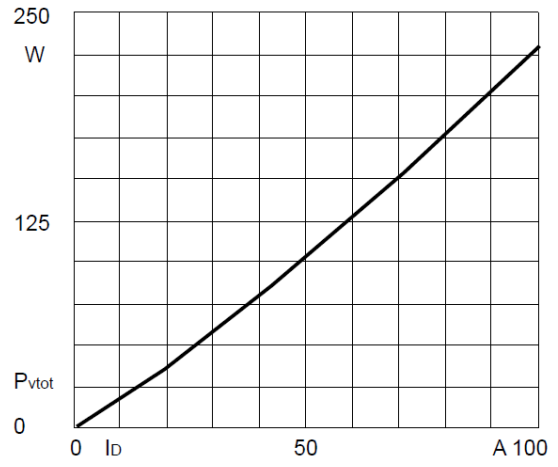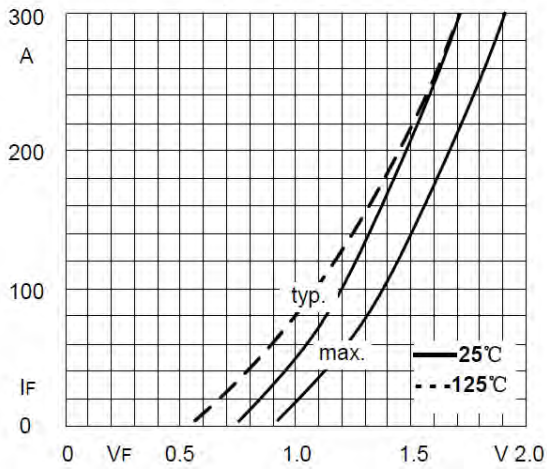