


SGG300N125UC2


Ultra Fast IGBT Modules




SGG300N125UC2

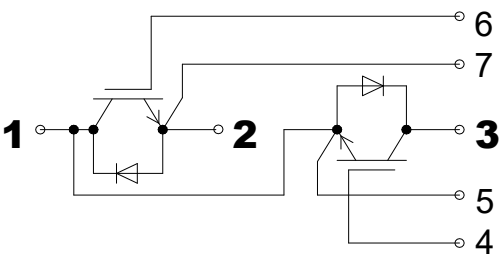

SGD300N125UC2

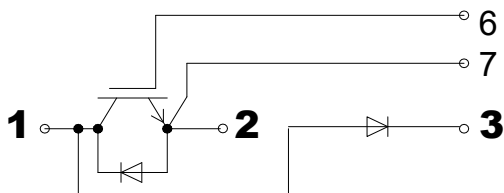

SDG300N125UC2

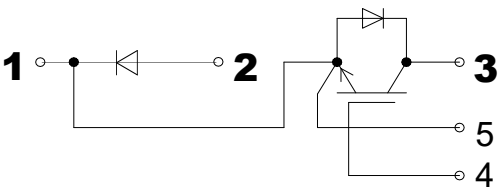

Symbol	Test Condition	Value	Unit
IGBT			
V_{CES}		1200	V
I_C	$T_C = 25(100)^{\circ}\text{C}$ per chip	300(200)	A
V_{GES}		± 20	V
$T_{vj} (T_{stg})$		$-40 \sim +150(125)$	$^{\circ}\text{C}$
P_{tot}		1670	W
INVERSE DIODE			
I_F	$T_C = 25(100)^{\circ}\text{C}$ per chip	300(200)	A
I_{FM}	$T_C = 25(100)^{\circ}\text{C}$ per chip	600(400)	A
V_{RRM}		1200	V
I_{FSM}	$T_J = 150^{\circ}\text{C}$, $t_p = 10\text{ms}$	2250	A

SGG300N125UC2

Ultra Fast IGBT Modules

Symbol	Test Conditions	Min	Typ	Max	Unit
Tc = 25°C unless otherwise specified					
V _{GE(th)}	V _{GE} =V _{CE} , I _C =6mA	4.5	5.5	6.5	V
I _{CES}	V _{GE} =0; V _{CE} =V _{CES} ; T _j =25(125)°C		0.35(2.50)	0.55(3.00)	mA
V _{CE(TO)}	T _j =25(125)°C		1.7(1.5)	2.3(2.0)	V
r _{CE}	V _{GE} =15V T _j =25(125)°C		11.0(9.0)	12.0(10.5)	mΩ
V _{CE(sat)}	I _C =200A; V _{GE} =15V; chip level		3.30	3.75	V
C _{ies}	V _{GE} =0V, V _{CE} =25V, f=1MHz		18.0	24.0	nF
C _{oes}			2.60	3.00	
C _{res}			1.00	1.30	
LCE				20	nH
RCC'+EE'	Terminal to Case, Tc=25(125)°C		0.35(0.50)		mΩ
t _{d(on)}	V _{CC} = 600V, I _C = 200A R _{GON} = R _{GOFF} = 3Ω T _j =125°C V _{GE} =±15V		125		ns
t _r			39		ns
t _{d(off)}			460		ns
t _f			29		ns
E _{on} /E _{off}			16.0/11.0		mJ
INVERSE DIODE					
Tc = 25°C unless otherwise specified					
V _F	I _F =200A; V _{GE} =0V; T _j = 25°C		1.9	2.5	V
Q _{rr}	I _F =200A; V _R =300V; T _j =25°C di/dt = 600A/us, V _{GE} =-15V		9.5		μC
I _{RRM}			75		A
E _{rec}			15.0		mJ
THERMAL CHARACTERISTICS					
R _{th(j-c)}	per IGBT			0.075	K/W
R _{th(j-c)D}	per FRD			0.180	K/W
Mechanical Data					
Ms		2.5		5	Nm
Weight			320		g

Features

- NPT Technology IGBT
- Fast Recovery Free Wheeling Diode
- Low Switching Losses
- $V_{ce(sat)}$ with positive temperature coefficient
- Fast Switching and short tail current
- Switched mode power supplies at $f_{sw}>20KHz$
- Resonant inverters up to 100KHz
- Electronic Welders at $f_{sw}>20KHz$

Application


- Welding inverters
- Inductive Heating

Advantages


- Space and weight savings
- Reduced protection circuits

SGG300N125UC2


Ultra Fast IGBT Modules

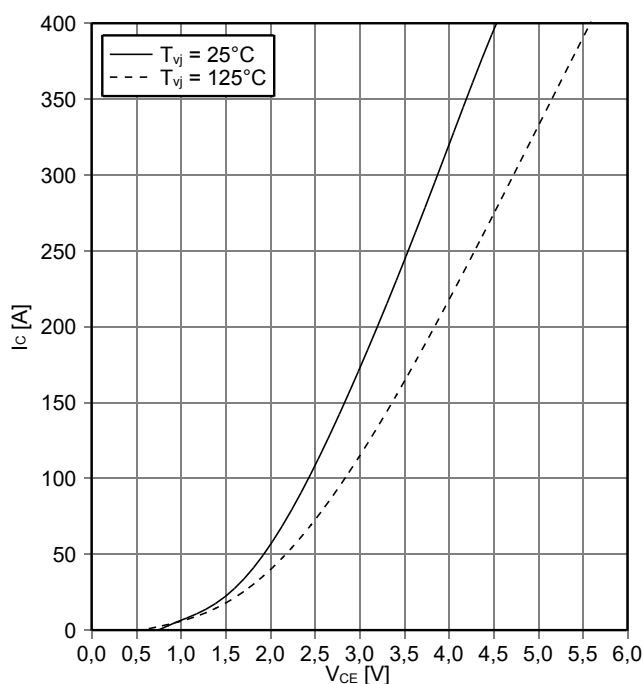


Output characteristic IGBT, Inverter (typical)
 $I_C = f(V_{CE}), V_{GE} = 15\text{ V}$

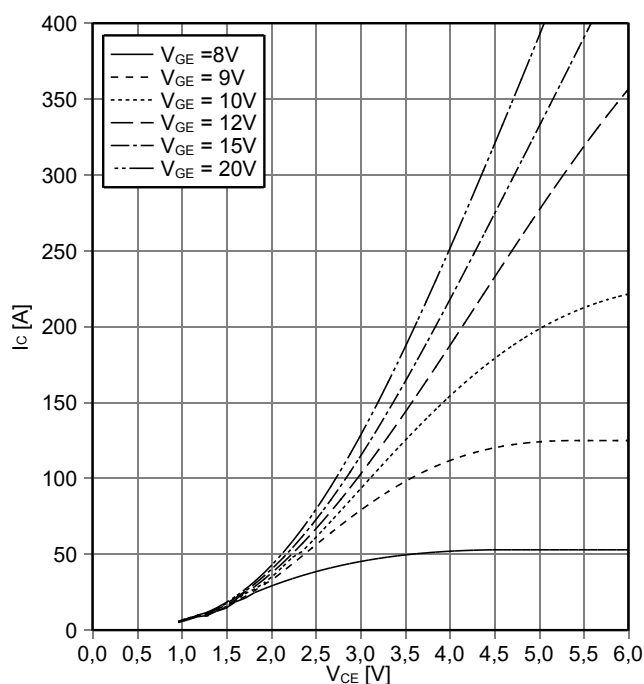

Output characteristic IGBT, Inverter (typical)
 $I_C = f(V_{CE}), T_{vj} = 125^\circ\text{C}$

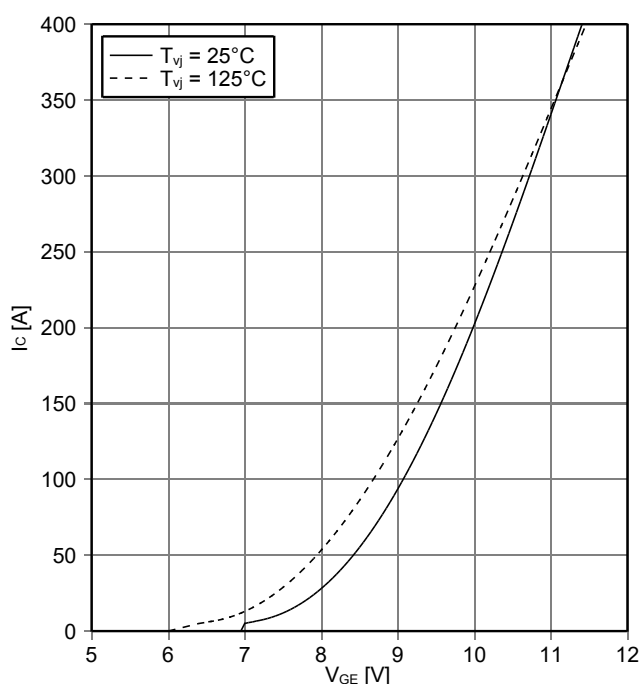


Transfer characteristic IGBT, Inverter (typical)
 $I_C = f(V_{GE})$
 $V_{CE} = 20\text{ V}$

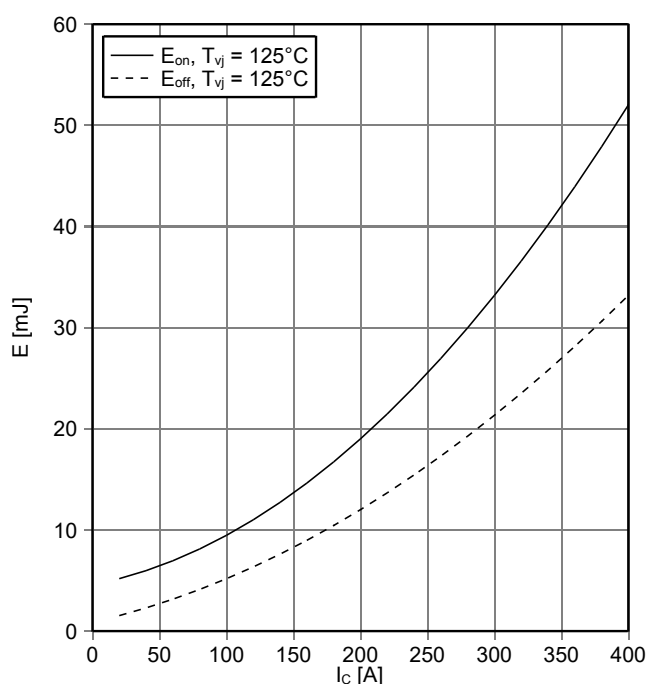

Switching losses IGBT, Inverter (typical)
 $E_{on} = f(I_C), E_{off} = f(I_C)$
 $V_{GE} = \pm 15\text{ V}, R_{Gon} = 4.7\ \Omega, R_{Goff} = 4.7\ \Omega, V_{CE} = 600\text{ V}$

SGG300N125UC2


Ultra Fast IGBT Modules

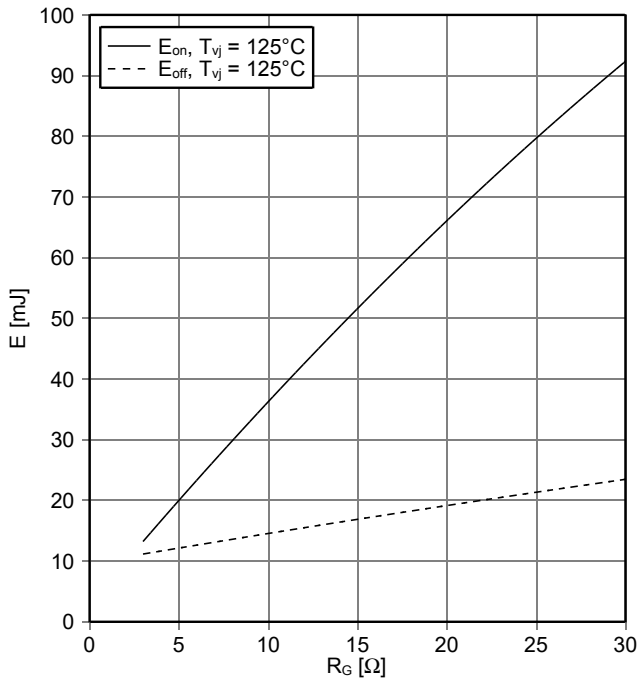

Switching losses IGBT, Inverter (typical)


$$E_{on} = f(R_G), E_{off} = f(R_G)$$

$$V_{GE} = \pm 15 \text{ V}, I_C = 200 \text{ A}, V_{CE} = 600 \text{ V}$$

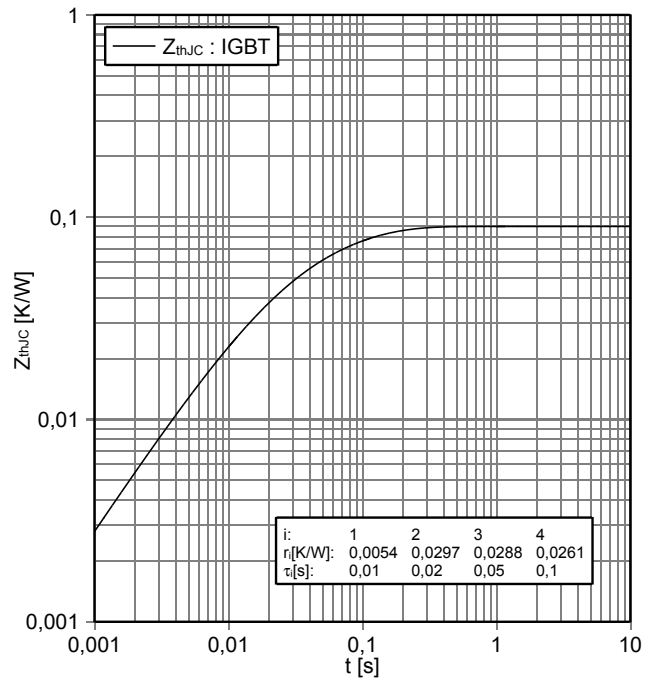


Transient thermal impedance IGBT, Inverter

$$Z_{thJC} = f(t)$$

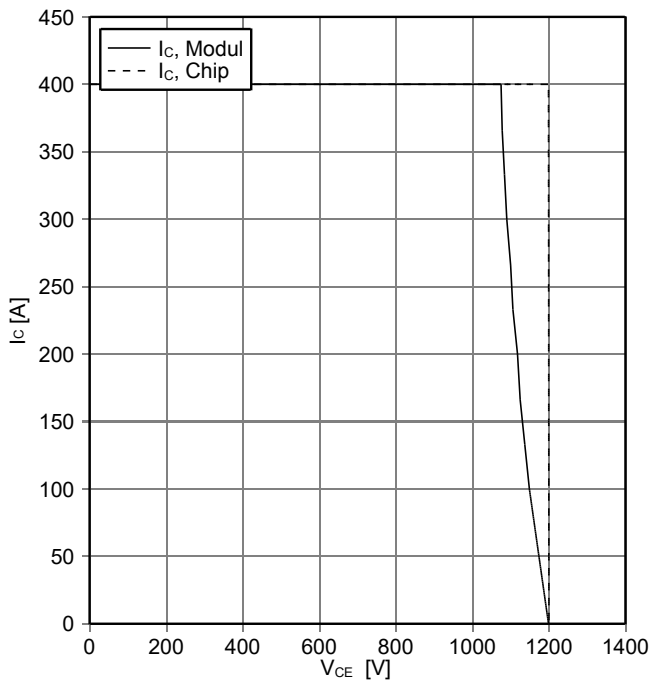

Reverse bias safe operating area IGBT, Inverter (RBSOA) $I_C = f(V_{CE})$

$$V_{GE} = \pm 15 \text{ V}, R_{Goff} = 4.7 \text{ } \Omega, T_{vj} = 125^{\circ}\text{C}$$

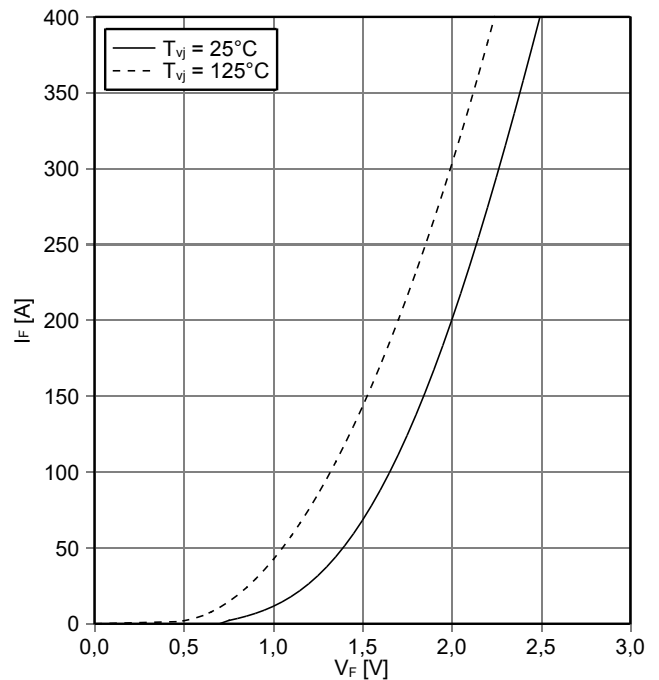


Forward characteristic of Diode, Inverter (typical)

$$I_F = f(V_F)$$

Sirectifier®

SGG300N125UC2


Ultra Fast IGBT Modules

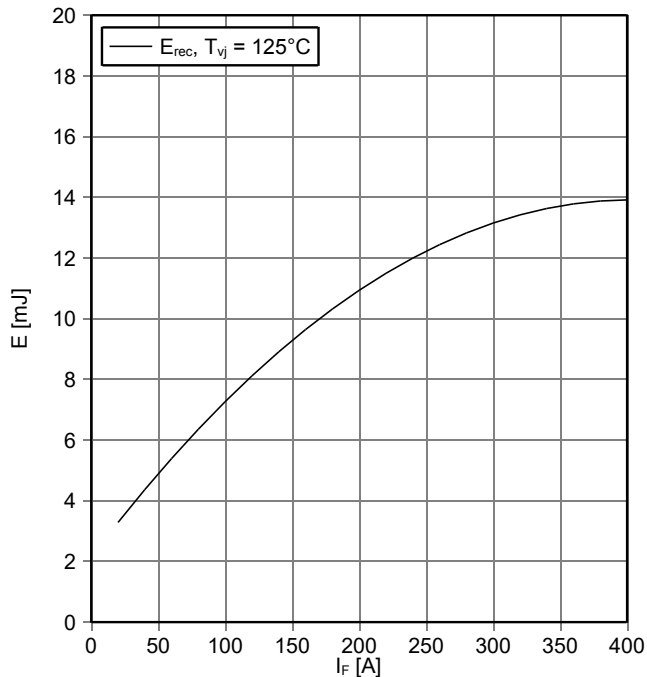

Switching losses Diode, Inverter (typical)

$$E_{rec} = f(I_F)$$


$$R_{Gon} = 4.7 \Omega, V_{CE} = 600 \text{ V}$$

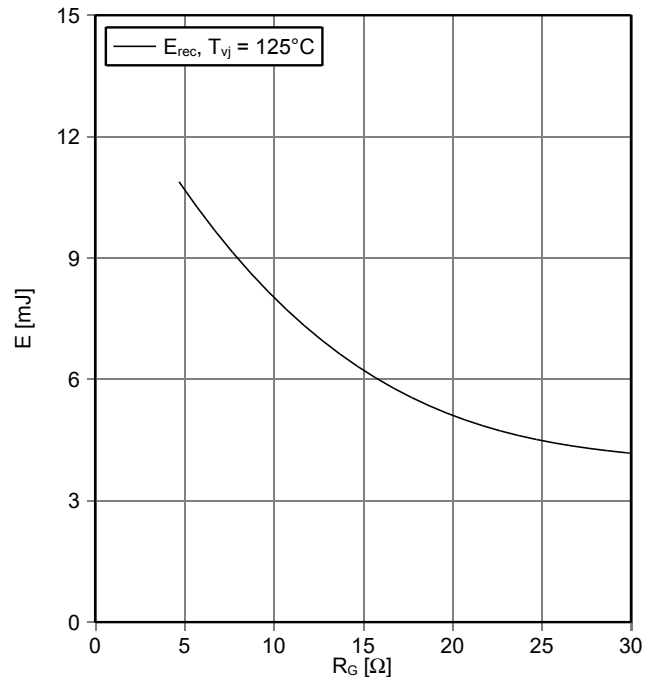

Switching losses Diode, Inverter (typical)

$$E_{rec} = f(R_G)$$

$$I_F = 200 \text{ A}, V_{CE} = 600 \text{ V}$$

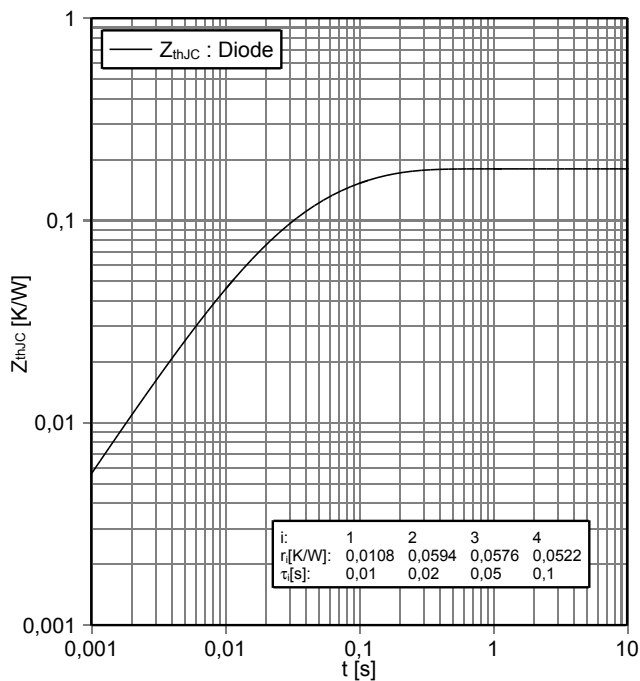

Transient thermal impedance Diode, Inverter

$$Z_{thJC} = f(t)$$

Sirectifier®

Ultra Fast IGBT Modules

